

Pepi Model J(A)

A snap-action thermostat specially designed for 120 and 240 VAC appliance and heater applications. Available with narrow differentials between opening and closing temperatures when tight control is critical.

FEATURES

- Snap-action device; quick make/quick break switching action.
- Temperature differential between opening and closing can be specified from 2°C to 40°C. Tighter differentials available upon request.
- Conductive bimetal construction; the bimetallic element carries the circuit current for maximum sensitivity under short circuit conditions.
- Preset calibration temperature; not adjustable in the field.
- Case electrically alive; insulating sleeving is available.
- Available with factory applied lead wires.

CONTACT RATINGS


- 5 amps/120 volts AC resistive
- 4 amps/240 volts AC resistive
- VDE certified

NOTE: SPECIAL STAMPING REQUIRED
Please consult our Sales Engineers for suggested contact ratings when applied to DC type loads.

CALIBRATION TEMPERATURE RANGE

- Available with nominal calibration temperatures from 60°C to 160°C


CURRENT DERATING CURVE

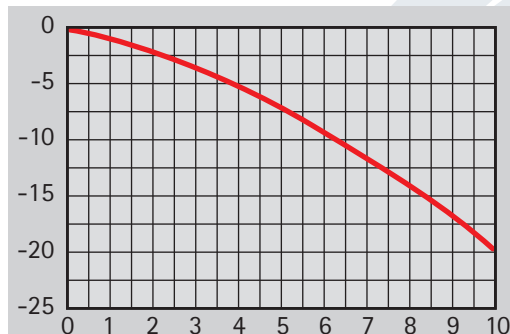


Holroyd Components Ltd.
Shire Hill Industrial Estate,
Saffron Walden, Essex
CB11 3AQ United Kingdom
Tel: +44 (0) 1799 523177
Fax: +44 (0) 1799 513714
sales@holroydcomponents.com
www.holroydcomponents.com



TOP VIEW

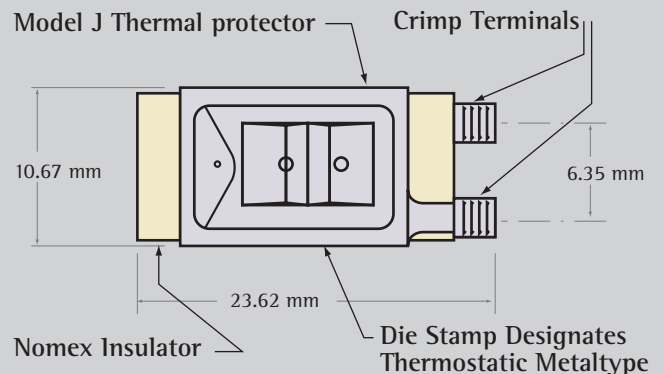

SIDE VIEW

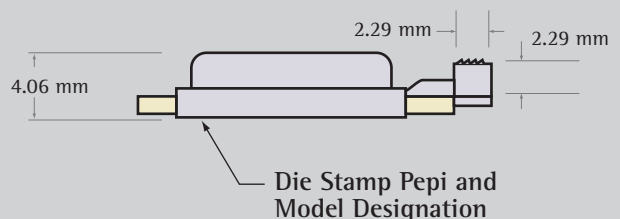

UL and VDE approved manufacturing facilities

www.holroydcomponents.com